Extensions / Features



▲ Height adjustable presser feet



▲ Liftable needles



▲ Automatic bobbin changer



▲ Modern touch control



▲ Longitudinal cutter



Panel cutter

Nähmaschinenfabrik Emil Stutznäcker GmbH & Co.KG

Max-Planck-Straße 3 50858 Cologne Germany

MAMMUT

Notes

+ 49 (0) 2234 218 0 info@mammut.de parts@mammut.de



mammut.d




MAMMUT VM 7 280

DOUBLE LOCKSTITCH MULTI-NEEDLE QUILTER

All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of Nähmaschinenfabrik Emil Stutznäcker GmbH & Co.KG 2023. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of Nähmaschinenfabrik Emil Stutznäcker GmbH & Co.KG or its affiliates. Any such unauthorized use for any purpose is a violation of the relevant copyright laws. Nähmaschinenfabrik Emil Stutznäcker GmbH & Co.KG, Max-Planck-Straße 3, 50858 Cologne, Germany

MAMMUT VM 7

combines highest speed and safety

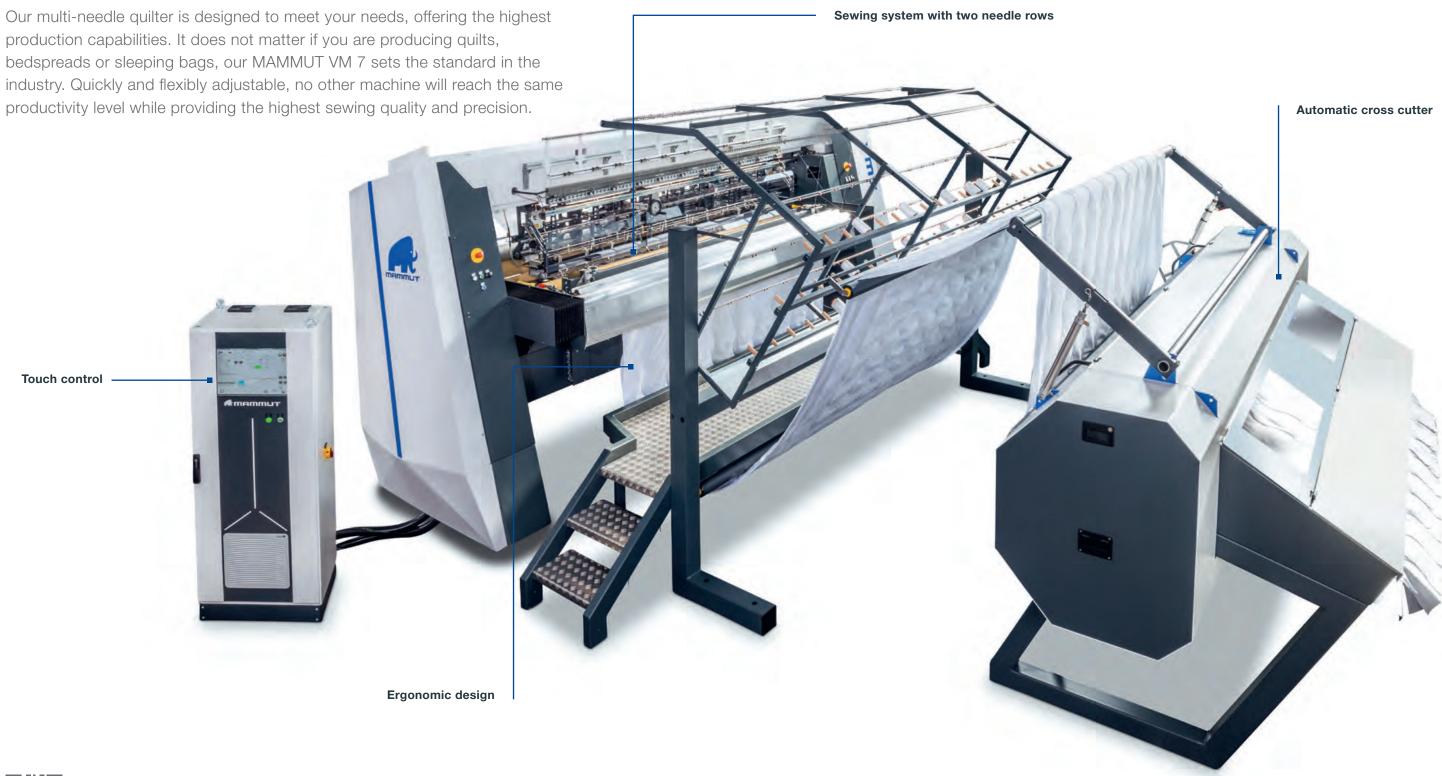





Die Abbildung zeigt MAMMUT VM 7 mit optionalem Equipment

For demanding applications

- » Featuring an infinitely variable and easily adjustable double sewing unit that is precise to the millimeter. By utilizing these precise needle adjustments, any and every pattern size can be formatted quickly with relative easy.
- » Also features completely adjustable sewing foot height, which can be repositioned within seconds during production. This allows you to avoid machine downtime even when constantly changing the filling weight.
- » Presser foot pause manoeuvre allows for pin-point accuracy with thin needles, even with heavy filling units at a high sewing speed.
- » An unprecedented variety of quilting patterns: From highly productive channel quilts to closed checkered spreads with and without border seams to freely programmable theme quilts.
- » Large bobbin capacity for maximum runtime without interruptions to change bobbins.



Double Lockstitch

Featuring a threefold revolving hook



custom-made quilt patterns.



with a floating bobbin case, thereby a high degree of sewing precision.



Flexibility

Infinitely variable sewing units for



Serviceability

Ergonomic machine concept for user-friendly service (Optional with providing non-sensitive settings and roller cards).





Innovation

The sewing and drive system is made of extremely durable and ultralight materials and is a real technological trendsetter in the industry.



Produktivity

Extremely high output quantity with limited maintenance effort.





Durability

Robustly designed, extremely durable, and ready to be used during intense three-shift factory production.

FURTHER INFORMATION

ELECTRICAL DATA	MECHANICAL DATA	GENERAL MACHINE DATA
 3 Phase/400 V 50-60 Hz 15 KW 	 3,500 x 4,300 x 2,500 mm (LxWxH) Weight approx. 7.300 kg Compressed air 6 bar Air consumption 150 I/min 	 up to 1,800 stitches / minute max. material width 2,800 mm max. distance of outer needles 2,400 mm min. needle distance 75 mm max. of 34 sewing units Stitch length 2-8 mm